




CABLE FTP C6

D200.6LFR3B

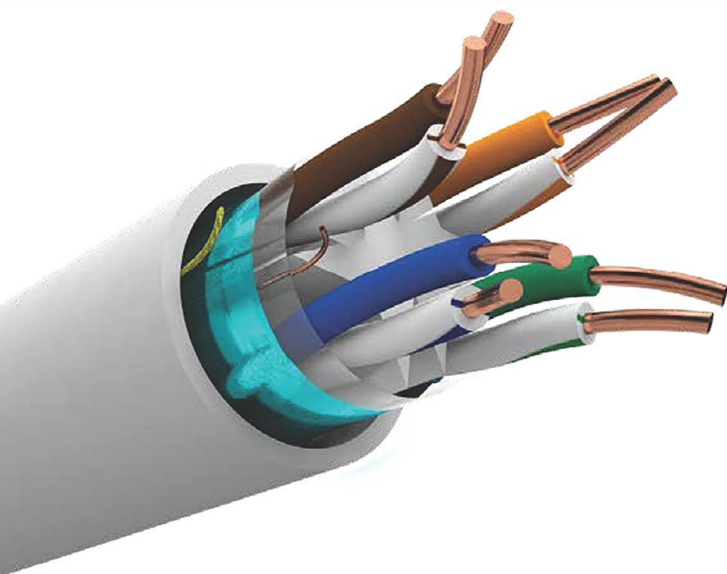

CABLE CONSTRUCTION

Conductor	Material	SOLID Bare Copper
	Nom.O.D (mm)	0.565±0.005mm. 23 & 24AWG
Insulation	Material	HPDE
Insulation Diam. ϕ		1.09 ± 0.03mm
Thickness		AVG: 0.30mm, MIN: 0.29mm
Shielded Global. Each Pair Unshielded	Polyester	Yes
	Filler	Yes
	Al Foil	Yes
	Drain Wire	Yes
	Rip Cord	Yes
Jacket LSZH-Rohs	Thickness	0.60mm ± 0.05mm - Black
	Outer Diam. ϕ	7.4 ± 0.40mm
	Jacket Color (standard)	White: RAL 9016
Code Color	1 White/Blue	2 White/Orange
	3 White/Green	4 White/Brown
Dimension - Weight	37x37x26cm & 50x50x24 - 55Kg/Km	
Packing	1 Wooden Drum	
Packing Length	305±1.0m & 500±1.0m	

PRODUCT DESCRIPTION

• Standard Reference:

ISO/IEC 11801:2011
IEC 61156-5 :2012
EN 13501-6
EN 50173-1:2011
EN 50173-2:2007 including amendment A1:2010
EN 50288-9-1:2012
EN 50288-4
EN 50575 :2014+A1:2016
EN 60332-1[1,2], 60332-3C, 60754-1[1,2], 61034-1[1,2]
ANSI/TIA-568-B-2 :2009

- Rated temperature: 90°C
- Installation temperature: -30°C~+50°C
- RoHS/REACH complied
- DoP N°: 2658-CPR-S015_FAM093_04
- Applications:
 - VoIP, ISDN
 - Token, 100MTP-PDM
 - Analog and Data Video
 - TR-16 Active and Passive
 - 115M/662m/1.2GATM
 - IEEE802.3: 100Base, 100Base-T, 1GBase-T

CPR Class:



TECHNICAL PERFORMANCE (100m)

Frequency (MHz)	RL(dB) min.	Attenuation (dB/100m) max.	NEXT (dB/100m)	ACR (dB)
1	20.0	2.0	74.3	72.28
4.0	23.0	3.8	65.3	61.49
8.0	24.5	5.3	60.8	55.43
10.0	25.0	6.0	59.3	53.35
16.0	25.0	7.6	56.2	48.68
20.0	25.0	8.5	54.8	46.31
25.0	24.3	9.5	53.3	43.83
31.25	23.6	10.7	51.9	41.20
62.5	21.5	15.4	47.7	31.98
100	20.1	19.8	44.3	24.50
200	18.0	29.0	39.8	14.60
250	17.3	32.8	38.3	9.48
Frequency (MHz)	ELFEXT (dB/100m)	PSNEXT (dB/100m)	PSSELFEXT (dB/100m)	Impedance (Ohms)
1	67.8	72.3	64.8	100±15
4	55.8	63.3	52.8	
8	49.7	58.8	46.7	
10	47.8	57.3	44.8	
16	43.7	54.2	40.7	
20	41.8	52.8	38.8	
25	39.8	41.3	36.8	
31.25	37.9	49.9	34.9	
62.5	31.9	45.4	28.9	
100	27.8	42.3	24.8	
200	21.8	37.8	18.8	
250	19.8	36.3	16.8	

CHARACTERISTICS

Max. Conductor DC Resistance at 20°C (Ω/Km)	< 93.8
Rated Temperature (°C)	75
Rated Voltage (V)	300V
Velocity Ratio	65%